



DW2150 [LE 450]

PLASTIC BASE MAGNETIC CONTACT / HIGH POWER



OVERALL


The high power base magnetic contacts of the DW2150 series are designed for installations where a high power is needed. Ideal for metallic shutter and up and over doors.

Certificate: *EN 50131-2-6 Grade 2 Class III*



TECHNICAL SPECIFICATIONS

Contact type	NA
Switching Voltage	Max. 100 V cc
Switching Current	Max 500 mA
Nominal Supply	Max 30 V cc
Contact Current	Max 200 mA
Contact Resistance	250 mΩ
Cable hose 4 x 0.18	2 meters
Flexo Cable Protector	Steel
Reed Wire Colour	Red / White
Contact Measures (mm)	130 x 40 x 12
Magnet Measures (mm)	95 x 46 x 40
Case Material	ABS
Colour	Grey
Magnet Type	Isotropic Ferrite
Temperature Range	-30°C to +70°C
Protection category	Class III

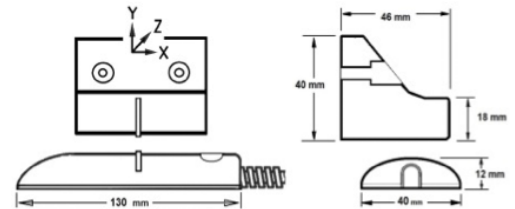

OPERATING RANGE $\pm 10\%$

- Upon Non-Ferromagnetic material
 - Y opening 95 mm - closing 75 mm
 - Z opening 50 mm - closing 50 mm
 - X lateral 35 mm
- Upon Ferromagnetic material
 - 20% under table



PARADOX HELLAS A.E.
Συστήματα Ασφαλείας & Πυρανίχνευσης

Κεντρικά: Κορίνθου 3, Μεταμόρφωση 14451 • Τηλ.: 210 28 55 000, Fax: 210 28 55 020
Εργοστάσιο: 69ο χλμ. Ε.Ο. Αθηνών Λαμίας, Βρύσες Ριτσώνας, Αυλίδα
www.paradox.gr • paradox-hellas@paradox.gr